

TD86

High speed turnstile gate



Technical parameter

Power supply: AC220V \pm 10%V 50HZ.

Power consumption: static power consumption < 50W, dynamic power consumption < 100W

Motor power: 40W(servo motor)

IP protection level: 42

Infrared quantity: 8 pairs infrared

Communication interface: switch value, optional RS232/RS485

MCBF:10 million life time

Door opening speed: 0.4s





Number of passers: 30 ~ 50/min

Working environment: indoor and outdoor (outdoor plus rain shed)-25 $^{\circ}$ C ~ 70 $^{\circ}$ C

Relative humidity \leq 90%, no condensation

Gate opening signal: 100 low level or passive contact signal not less than 100

Chassis material: standard 304 stainless steel. thickness:1.5mm ~ 3.0mm

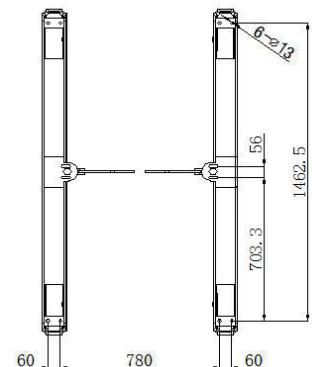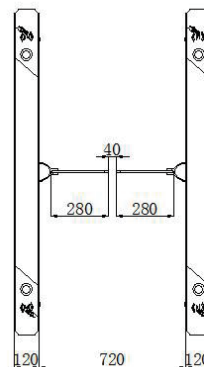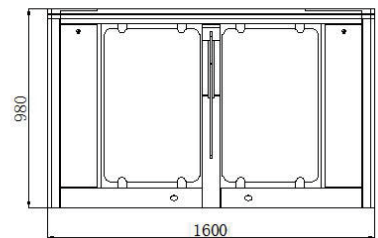

* The appearance of the chassis can be customized according to requirements