


CW 408

Fast anti-collision swing turnstile

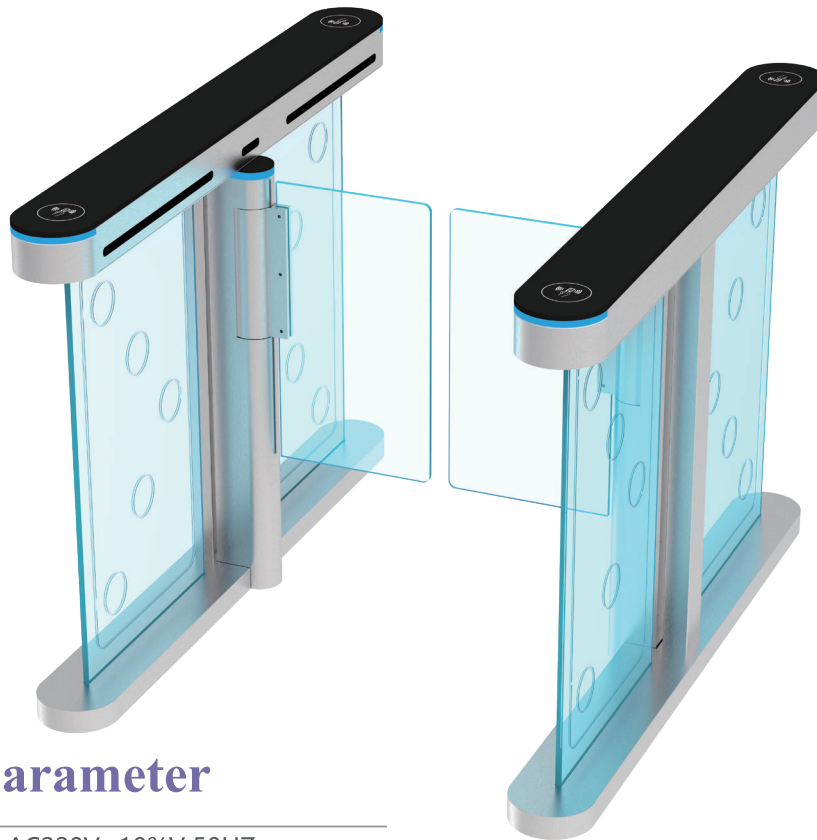

Technical parameter

Power supply: AC220V±10%V 50HZ.

Power consumption: static power consumption < 50W, dynamic power consumption < 100W

Motor power: 40W(brushless motor)

IP protection level: 42

Infrared quantity: 7 pairs infrared

Communication interface: switch value, optional RS232/RS485

Channel width: 600mm ~ 1000mm

Door opening speed: 0.6s

Number of passers: 30 ~ 40/min

Working environment: indoor and outdoor (outdoor plus rain shed)-25°C ~ 70°C

Relative humidity≤90%, no condensation

Gate opening signal: 100 low level or passive contact signal not less than 100

Chassis material: standard 304 stainless steel. thickness:1.2mm ~ 3.0mm

* The appearance of the chassis can be customized according to requirements

